
FC Fast Oil Connection

Fully automatic quick coupling system



Increased flexibility and profitability

- Fewer moving parts in the connections
- Mechanically lockablefunctions on both the pins
- · Electrical quick coupling
- Easier maintenance

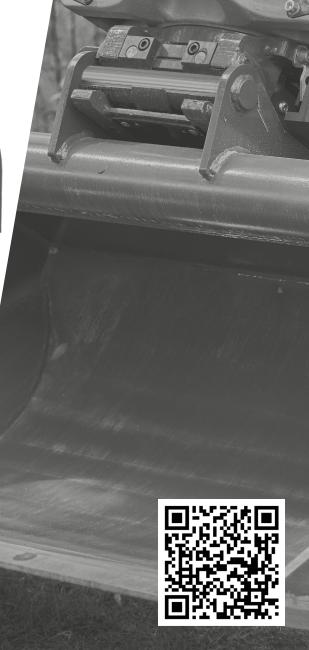



The FC Quick Coupling System makes your work more efficient as you never need to leave the cab to change tools. Always having the right tool for the right task will facilitate for you and make your work quicker and safer.

FC has built-in hydraulic, lubricant and electrical connections. The oil from the excavator flows through the coupler, which in turn is connected to the tool's compatable FC coupler. This allows the oil to flow from the machine to the tool attachment without the operator having to step out of the cab to connect hoses.

The FC quick coupler system has a double mechanical locking of both the front and back axles. The quick coupler system can be combined with an FC tiltrotator, making it easy to connect and disconnect the tiltrotator without having to manually attach hoses for the tiltrotator's functions.

TECHNICAL SPECIFICATIONS

Quick Coupling Size	Carrier Weight	Number Of Hydraulic Connections
FC 60	08-18 tonnes	5 (2x3/4", 1x1/2", 2x 3/8")
FC 70	15-28 tonnes	5 (3x3/4", 2x1/2")
FC 80	25-40 tonnes	6 (2x1", 2x 3/4", 2x 1/2")
FC 90	40-70 tonnes	9 (4x1", 1x 3/4", 3x 1/2", 1x3/8")

Visit our website!

